

RoHS
Compliant



Features

- Stainless Steel Housing
- Rugged and Durable
- Mains Voltage Variant
- Suitable for Food Contact
- Extended Temperature Range

Electrical Characteristics @ 25°C

Parameter	Range	UOM
Contact Form	Normally Open (Form A)	-
Contact Rating Max.	50	W/VA
Switching Voltage Max.	200	V DC
	250	V AC
Switching Current Max.	1.5	A
Carry Current Max.	2	A
Breakdown Voltage Min.	400	V DC
Total Resistance Max.	150	mΩ

Environmental Characteristics

Parameter	Range	UOM
Operating Temperature	-40 to +125	°C
Storage Temperature	-40 to +125	°C


Mechanical Characteristics

Parameter	Range	UOM
Density of Float Typical	0.7	g / cm ³
Recommended minimum Gravity of Medium	Density of Float +20%	g / cm ³

Material Informations


Parameter	Material	Colour
Housing	Stainless Steel 304, Mechanically Polished	-
Cable	UL 1332, AWG 24, 4mm Stripped & Tinned	Black
Nuts	Stainless Steel 304, M10, 1pc Preassembled	-
Float	Stainless Steel 304, Mechanically Polished	-
Potting	PU / Epoxy	Black
Sealing Ring	Silicone	White

Dimensions

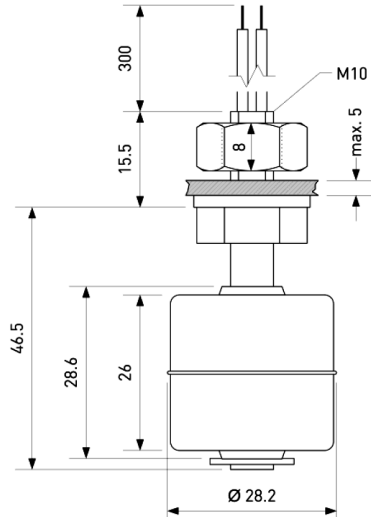

Dimensions : Millimetres


Operation View



Remarks

When mounted near ferromagnetic parts switching distance of MCPLS-045A-6VAI may vary. Electromagnetical influences and magnetic fields may change the switching behaviour of the Level Sensor.

Mounting



When mounted stem up, operating functions are reversed.

Part Number Table

Description	Part Number
Float Switch, Vertical, SPST-NO, Stainless Steel, 250V AC, 28.2mm Diameter	MCPLS-045A-6VAI

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.